

*Model 3149*

# **BiConiLog™ Antenna**

**User Manual**



 **ETS-LINDGREN**<sup>®</sup>  
An ESCO Technologies Company

ETS-Lindgren Inc. reserves the right to make changes to any products herein to improve functioning or design. Although the information in this document has been carefully reviewed and is believed to be reliable, ETS-Lindgren does not assume any liability arising out of the application or use of any product or circuit described herein; nor does it convey any license under its patent rights nor the rights of others. All trademarks are the property of their respective owners.

**© Copyright 2003–2018 by ETS-Lindgren Inc. All Rights Reserved. No part of this document may be copied by any means without written permission from ETS-Lindgren Inc.**

Trademarks used in this document: The ETS-Lindgren logo is a registered trademark of ETS-Lindgren Inc.

**Revision Record | MANUAL, MODEL 3149 | Part #399283, Rev. D**

<b>Revision</b>	<b>Description</b>	<b>Date</b>
A	Initial Release	November, 2003
B	Rebrand	May, 2009
C	Corrected range	December, 2016
D	Corrected electrical specs	February, 2018


# Table of Contents

<b>Notes, Cautions, and Warnings</b> .....	<b>v</b>
<b>1.0 Introduction</b> .....	<b>7</b>
Standard Configuration .....	8
Tripod Options .....	9
ETS-Lindgren Product Information Bulletin .....	10
<b>2.0 Maintenance</b> .....	<b>11</b>
Annual Calibration .....	11
Replacement and Optional Parts .....	11
Service Procedures .....	11
<b>3.0 Specifications</b> .....	<b>13</b>
Electrical Specifications .....	13
Physical Specifications .....	13
<b>4.0 Bow Tie Assembly Instructions</b> .....	<b>15</b>
<b>5.0 Mounting Instructions</b> .....	<b>17</b>
Using Included Mounting Adapters .....	17
Using the Stinger Mount .....	19
Additional Mounting Options .....	20
4-TR Mounting Options.....	20
7-TR and Mast Mounting Options.....	21
2x2 Boom Mounting Options .....	22
Other Mounting Options.....	23
<b>6.0 Application</b> .....	<b>25</b>
<b>7.0 Typical Data</b> .....	<b>27</b>
Model 3149 Antenna Factor at 10m .....	27
Model 3149 Gain at 10m .....	28
Model 3149 Forward Power.....	29
Model 3149 Horizontal Measured Power.....	30
Model 3149 Vertical Measured Power.....	31
<b>Appendix A: Warranty</b> .....	<b>33</b>

This page intentionally left blank.

## Notes, Cautions, and Warnings

---

	<p><b>Note:</b> Denotes helpful information intended to provide tips for better use of the product.</p>
<p><b>CAUTION</b></p>	<p><b>Caution:</b> Denotes a hazard. Failure to follow instructions could result in minor personal injury and/or property damage. Included text gives proper procedures.</p>
<p><b>WARNING</b></p>	<p><b>Warning:</b> Denotes a hazard. Failure to follow instructions could result in SEVERE personal injury and/or property damage. Included text gives proper procedures.</p>




See the ETS-Lindgren *Product Information Bulletin* for safety, regulatory, and other product marking information.

This page intentionally left blank.

## 1.0 Introduction

---

The **ETS-Lindgren Model 3149 BiConiLog™** is a dual-purpose antenna that can be used for both emissions and immunity applications. The Model 3149 is a hybrid linearly polarized EMC antenna consisting of a log periodic dipole array (LPDA) and a single bow tie antenna.

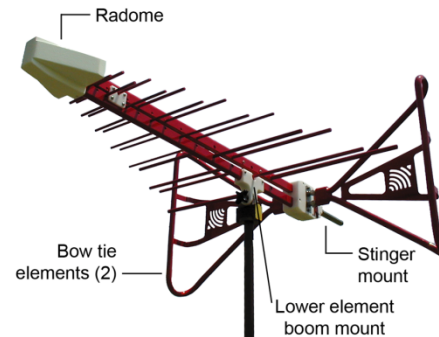

The Model 3149 has an ultra broadband frequency range, accepts high power input, and is size-efficient for easy transport and use in compact chambers. Rugged construction assures dimensional and electrical stability over extended use.

The BiConiLog antenna combines the best characteristics of biconical and log periodic antennas, sweeping over a wide frequency range and making it ideal for automated testing. The 80 MHz to 5 GHz frequency range of the Model 3149 is the broadest and highest of all BiConiLog antennas and most commercially available antennas of this type.

The Model 3149 accepts up to 800 W of peak power input at the lower frequencies of operation. The high gain and low VSWR over the operating frequency range translate into efficient amplifier use for field generation. The Model 3149 differs from most biconical and log periodic hybrids with relatively low VSWR at the lower frequencies of operation, allowing about half the power to be radiated by the antenna.

Antenna performance can be degraded by cross polarization of horizontal and vertical signals. In high frequency log periodic antennas where elements are small and closely spaced, cross polarization can be difficult to avoid. The high frequency section of the Model 3149 was modeled and precision manufactured to avoid this problem. Cross polarization rejection in the Model 3149 exceeds 20 dB, making this antenna one of the few antennas that are compliant for CISPR16-1 measurements.

An antenna constructed to maximize structural integrity is better able to maintain its electrical properties; the benefits are better measurement repeatability, lower uncertainty values, and longer calibration validity. The Model 3149 is able to thrive in an environment of constant use due to its rugged construction and the implementation of these design elements:

- Custom aluminum extrusions are used for the boom material.
- Dipole elements connect with capped Allen screws for secure attachment, yet allow repair and replacement as necessary.
- An all-weather, energy absorbing radome protects the high frequency element.
- Tubular bow tie elements connect to the balun box using positive aligning and easily attached compression fittings.
- The finished antenna receives a durable powder coat finish.

The Model 3149 provides a flexible mounting scheme to accommodate most antenna towers and tripods. The antenna can be securely mounted using the 22-mm diameter stinger or the lower element boom mount.

- The stinger mount provides on-axis center point rotation of the antenna during polarization and can be mounted to ETS-Lindgren and most other brands of antenna towers.
- The lower element boom mount on the Model 3149 can be used with all tripods and with ETS-Lindgren antenna masts that have an offset cross boom.

For the steps to mount the Model 3149, see *Mounting Instructions* on page 17.

### **Standard Configuration**

---

- Antenna
- Bow tie elements (2)
- Wrenches (2) attached to the balun box for use on bow tie compression fittings
- Lower element boom mount includes mounting bracket and mounting knob



## Tripod Options

---

ETS-Lindgren offers the following non-metallic, non-reflective tripods for use at both indoor and outdoor EMC test sites.

- **4-TR Tripod**—Constructed of linen phenolic and delrin, designed with an adjustable center post for precise height adjustments. Maximum height is 2.0 m (80.0 in), and minimum height is 94 cm (37.0 in). This tripod can support up to an 11.8 kg (26.0 lb) load.



- **7-TR Tripod**—Constructed of PVC and fiberglass components, providing increased stability for physically large antennas. The unique design allows for quick assembly, disassembly, and convenient storage. Allows several different configurations, including options for manual or pneumatic polarization. Quick height adjustment and locking wheels provide ease of use during testing. Maximum height is 2.17 m (85.8 in), with a minimum height of .8 m (31.8 in). This tripod can support a 13.5 kg (30 lb) load.



## **ETS-Lindgren Product Information Bulletin**

---

See the ETS-Lindgren *Product Information Bulletin* included with your shipment for the following:

- Warranty information
- Safety, regulatory, and other product marking information
- Steps to receive your shipment
- Steps to return a component for service
- ETS-Lindgren calibration service
- ETS-Lindgren contact information

## 2.0 Maintenance

---

### CAUTION

Before performing any maintenance, follow the safety information in the ETS-Lindgren *Product Information Bulletin* included with your shipment.



Maintenance of the Model 3149 is limited to external components such as cables or connectors.

If you have any questions concerning maintenance, contact ETS-Lindgren Customer Service.

### Annual Calibration

---

See the *Product Information Bulletin* included with your shipment for information on ETS-Lindgren calibration services.

### Replacement and Optional Parts

---

Following are the part numbers for ordering replacement or optional parts for the Model 3149 BiConiLog™ Antenna.

Part Description	Part Number
Polarizing Mounting Adapter	100989
Thread Insert	105861B



For additional/optional mounting hardware, see *Additional Mounting Options* on page 19.

### Service Procedures

---

For the steps to return a system or system component to ETS-Lindgren for service, see the *Product Information Bulletin* included with your shipment.

This page intentionally left blank.

### 3.0 Specifications

---

#### Electrical Specifications

---

<b>Frequency Range:</b>	80 MHz–6 GHz
<b>Impedance (Nominal):</b>	50 $\Omega$
<b>VSWR (Average):</b>	6.5:1 (maximum)* <2:1 (typical)
<b>Maximum Continuous Power:</b>	<ul style="list-style-type: none"><li>• <b>750 W:</b> 80 MHz–150 MHz</li><li>• <b>500 W:</b> 150 MHz–600 MHz</li><li>• <b>360 W:</b> 600 MHz–1 GHz</li><li>• <b>200 W:</b> 1 GHz–6 GHz</li></ul>
<b>Connector:</b>	Type N

\* 7:1 max is for bow tie element; better than 2:1 is for LPDA section

#### Physical Specifications

---

<b>Height:</b>	53.24 cm (20.96 in)
<b>Depth:</b>	129.50 cm (50.98 in)
<b>Width:</b>	91.00 cm (35.83 in)
<b>Weight:</b>	5.0 kg (11.0 lb)

This page intentionally left blank.

## 4.0 Bow Tie Assembly Instructions

---

### CAUTION


Before connecting any components, follow the safety information in the ETS-Lindgren *Product Information Bulletin* included with your shipment.

The Model 3149 ships with the bow tie elements detached. The tubular bow tie elements easily attach to the balun box using positive aligning compression fittings. To attach the bow tie elements:

1. For stability, first mount the Model 3149 onto a tripod or tower. See *Mounting Instructions* on page 17 for the steps to mount the antenna.

### CAUTION

To avoid losing the compression rings, do not remove the nuts on the compression fittings.

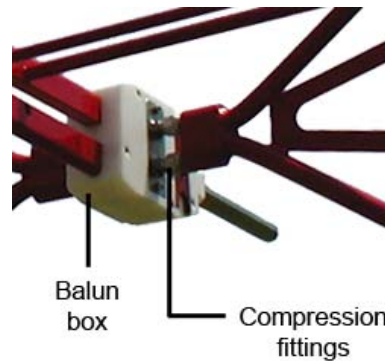

2. Align the compression fittings with the threaded connectors on the balun box.

**CAUTION**

Do not cross thread this connection or permanent damage to the bow tie element could occur.

3. Thread the compression fittings together using the included wrench.
4. Repeat steps 2 and 3 for the second bow tie element.



## 5.0 Mounting Instructions

---

### CAUTION

Before connecting any components, follow the safety information in the ETS-Lindgren Product Information Bulletin included with your shipment.

### CAUTION


The Model 3149 is a precision measurement device. Handle with care.

### Using Included Mounting Adapters

---

The Model 3149 BiConiLog™ Antenna ships with these mounting adapters:

- **100989 Polarizing Mounting Adapter with 7/8–14 thread receptacle**




- **105861B 1/4–20 Thread Insert**



To mount the Model 3149 using the lower element boom mount and included mounting adapters:

1. Located on the bottom of the polarizing adapter is a 7/8–14 thread receptacle; if you need to convert to a 1/4–20 receptacle, insert the 1/4–20 thread insert into the polarizing adapter.
2. Attach the polarizing adapter to tripod or tower.

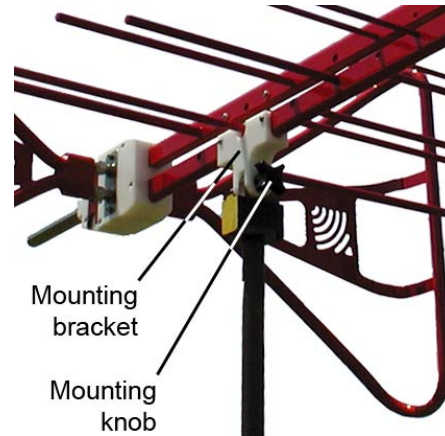

Do not cross thread or permanent damage to the adapter and thread insert could occur.

3. Remove the mounting knob from the mounting bracket on the antenna.
4. Slide the mounting bracket onto the polarizing adapter with the polarizing adapter placed between the shoulders of the mounting bracket.
5. Thread the mounting knob through the mounting bracket, then through the polarizing adapter, and finally through the hex nut.
6. Tighten the mounting knob to secure the antenna.

## Using the Stinger Mount

---

The stinger mount provides on-axis rotation during 90° horizontal or vertical polarization. The stinger enables you to mount the antenna directly to an ETS-Lindgren 7-TR Tripod or mast.



If mounting the Model 3149 to a 7-TR, use the center rotate boom (part# 108197) for rear-mount stinger-type antennas.



Additional hardware is required to use the stinger to mount the Model 3149 to a mast. For information on ordering optional mounting hardware, contact the ETS-Lindgren Sales Department.



Do not use the stinger to mount the Model 3149 onto a 4-TR tripod.

1. With the 108197 center rotate boom installed on the 7-TR, thread the antenna feed or receiving cable through the center of the boom so that the connector for the antenna emerges at the clamp end of the boom.

Clamp end  
of boom



2. Attach the cable to the Type N connector on the antenna.

3. Slide the cable and stinger into the clamp on the boom, carefully guiding the cable out the other end.


4. When you reach the back of the balun box, align it with the boom receptacle, and then slide the smaller portion of the balun box into the boom. This will prevent rotation of the antenna unless the boom is being polarized.

5. Tighten the clamp knob on the boom to secure the antenna into place.

## Additional Mounting Options

### 4-TR MOUNTING OPTIONS

Following are additional options for mounting the Model 3149 onto an ETS-Lindgren 4-TR tripod. Contact the ETS-Lindgren Sales Department for information on ordering optional mounting hardware.

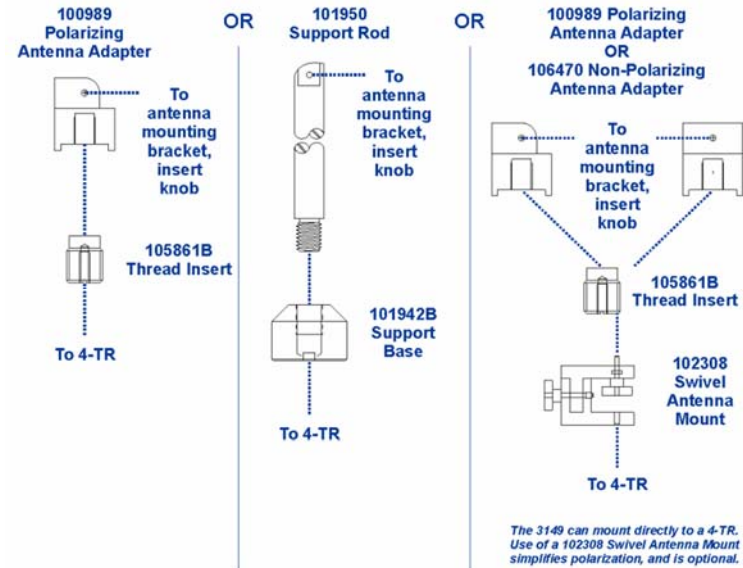

## 7-TR AND MAST MOUNTING OPTIONS

The stinger on the Model 3149 enables you to mount to antenna directly to an ETS-Lindgren 7-TR Tripod Positioner. Following are additional options for mounting the Model 3149 onto an ETS-Lindgren 7-TR Tripod Positioner.


Contact the ETS-Lindgren Sales Department for information on ordering optional mounting hardware.



*Mast* refers to 2070 Series, 2075, and 2175 Antenna Towers.

*7-TR* refers to 109042, 106328, and 108197 booms:

- *109042 boom*—Straight boom; for general antenna mounting on a 7-TR
- *106328 boom*—Offset boom; for general antenna mounting on a 7-TR with pneumatic or manual polarization
- *108197 boom*—Center rotate boom; for rear-mount stinger-type antennas only

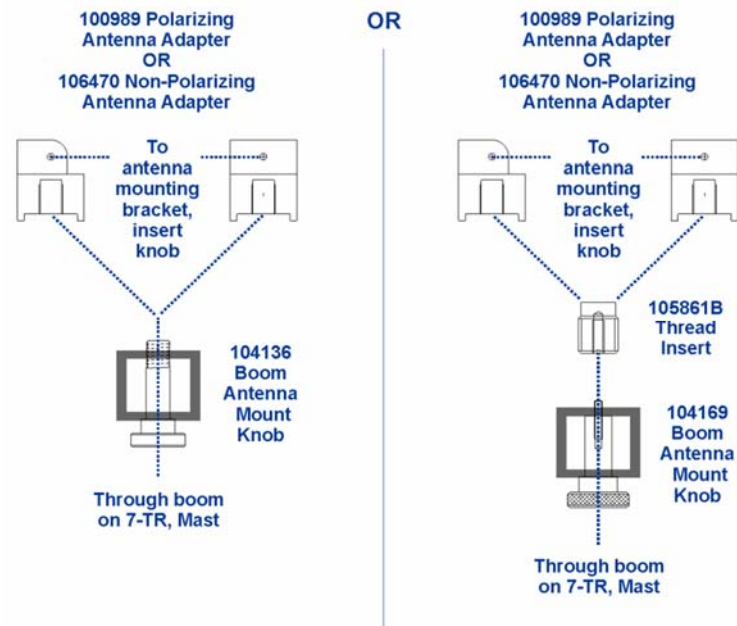


## 2x2 BOOM MOUNTING OPTIONS

Following are additional options for mounting the Model 3149 onto a 2x2 boom.  
Contact the ETS-Lindgren Sales Department for information on ordering optional mounting hardware.




2x2 *boom* refers to a typical 2-inch by 2-inch boom.

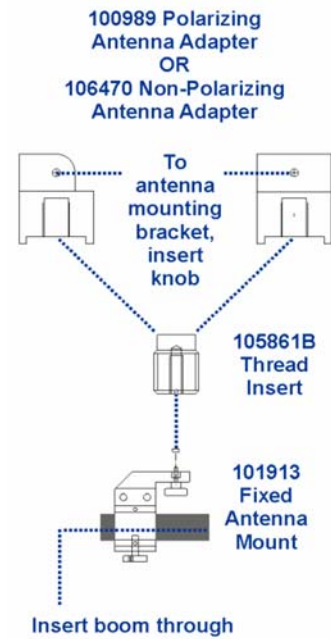

## OTHER MOUNTING OPTIONS

Following are additional options for using the stinger to mount the Model 3149 onto a non-stinger mount. Contact the ETS-Lindgren Sales Department for information on ordering optional mounting hardware.

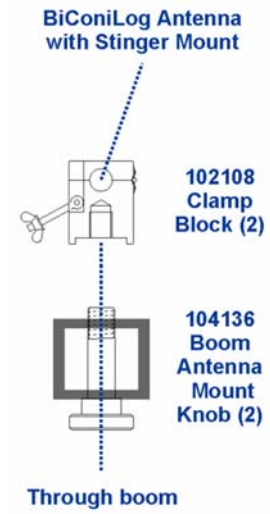

This page intentionally left blank.



## 6.0 Application

---

For emissions measurements, electric field strength in  $db[V/m]$  is obtained from:

$$E(\text{dB}[V/m]) = V(\text{dB}[V]) + AF(\text{dB}[1/m]) + \alpha(\text{dB})$$

**V** = the receiver or spectrum analyzer voltage reading

**AF** = antenna factor

**$\alpha$**  = cable loss in dB, if cable losses are non-negligible

For immunity testing, the electric field strength generated at a distance  $d$  can be approximated by:

$$E(\text{V / m}) = \frac{\sqrt{30Pg}}{d}$$

**d** = distance, in meters

**g** = numeric gain ( $10^{G[\text{dB}]/10}$ )

**P** = antenna net input power, in watts

An estimate of the power required for any field strength  $E$  can be obtained from the gain or forward power graphs in *Typical Data* on page 27, which shows power required in watts to generate 1 V/m. For any other field strength not shown, multiply the power in watts by the desired E-field squared, or:

$$P(E \text{ V/m}) = E^2 P(1 \text{ V/m})$$

Actual transmitted field strength should be verified using an ETS-Lindgren electric field probe, or equivalent.

For IEC 1000-4-3 type testing, the antenna tip can be placed at any distance between one and three meters from the EUT as long as the front face plane is illuminated according to the -0, +6 dB uniform field specification. In general, closer distances require less power to create a given field strength


This page intentionally left blank.

## 7.0 Typical Data

---


### Model 3149 Antenna Factor at 10m

---

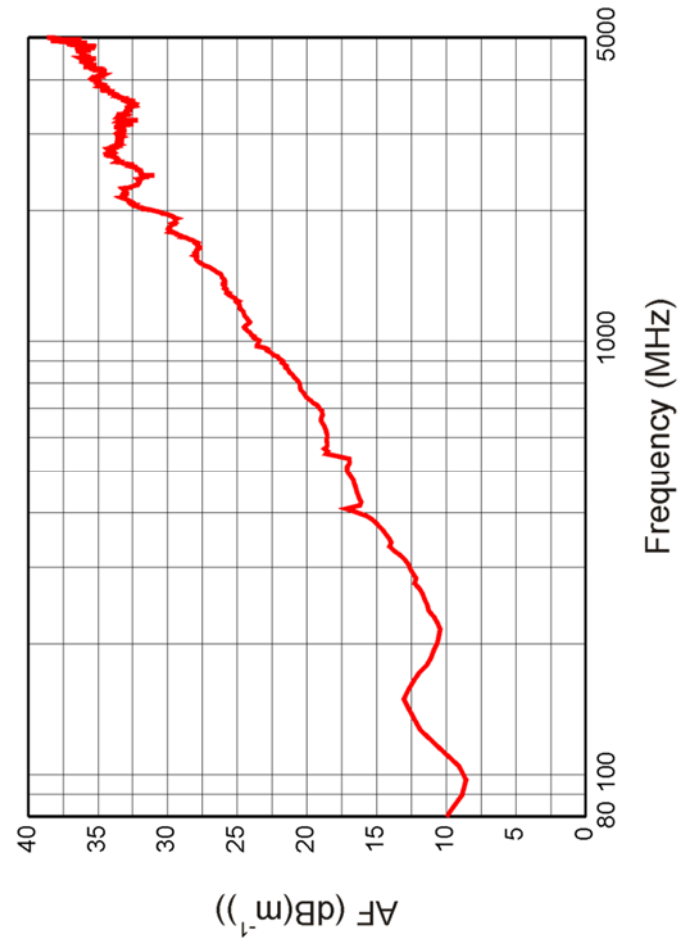


### Model 3149 Gain at 10m

---

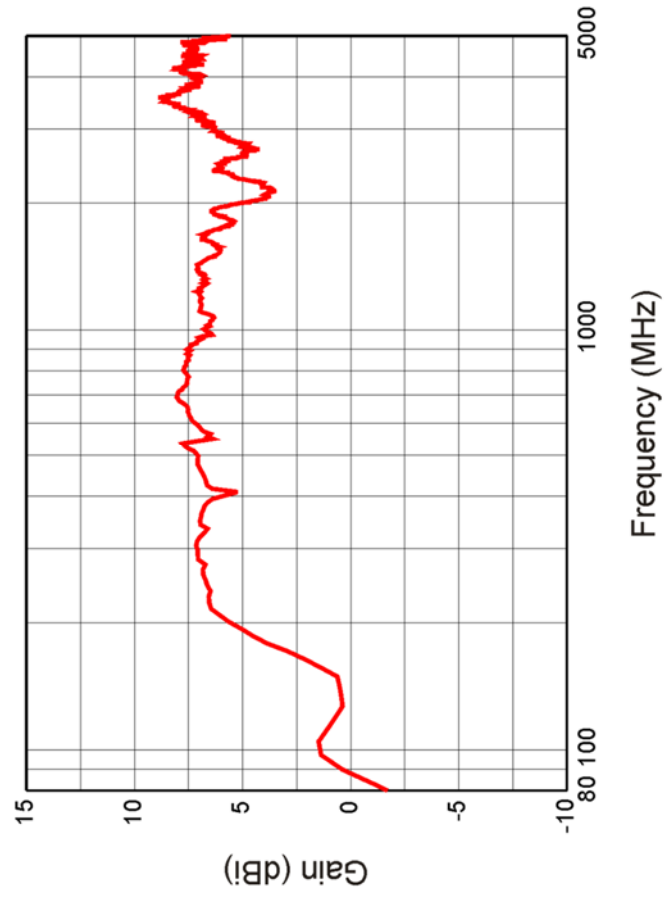


### Model 3149 Forward Power

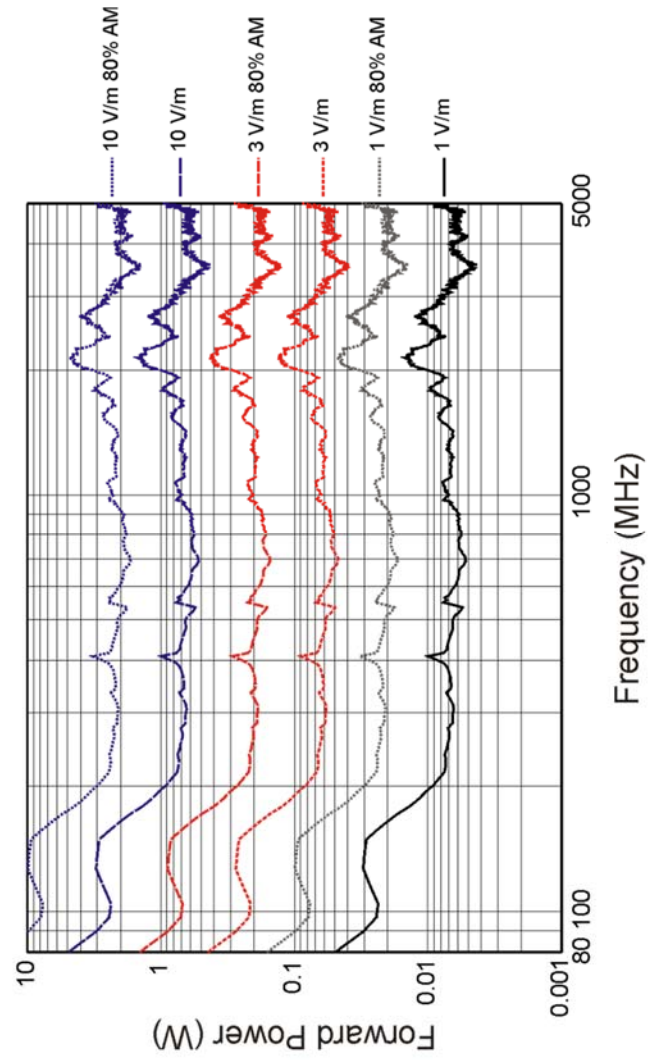


## Model 3149 Horizontal Measured Power

Power requirements scaled from measured data for 3 V/m at 80% modulation over ferrite up to 1 GHz and measured over EHP-18PCL from 1 GHz to 2 GHz (horizontal polarization). Reference point: 3 m from antenna tip and 1.2 m over ground.

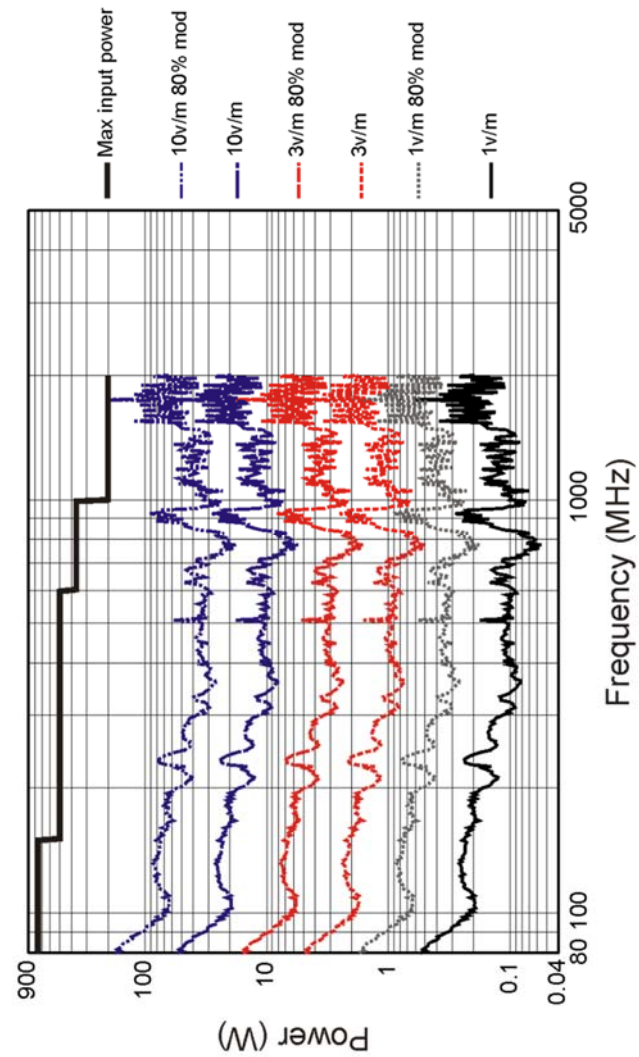

### Model 3149 Vertical Measured Power

Power requirements scaled from measured data for 3 V/m at 80% modulation over ferrite up to 1 GHz and measured over EHP-18PCL from 1 GHz to 2 GHz (vertical polarization). Reference point: 3 m from antenna tip and 1.2 m over ground.

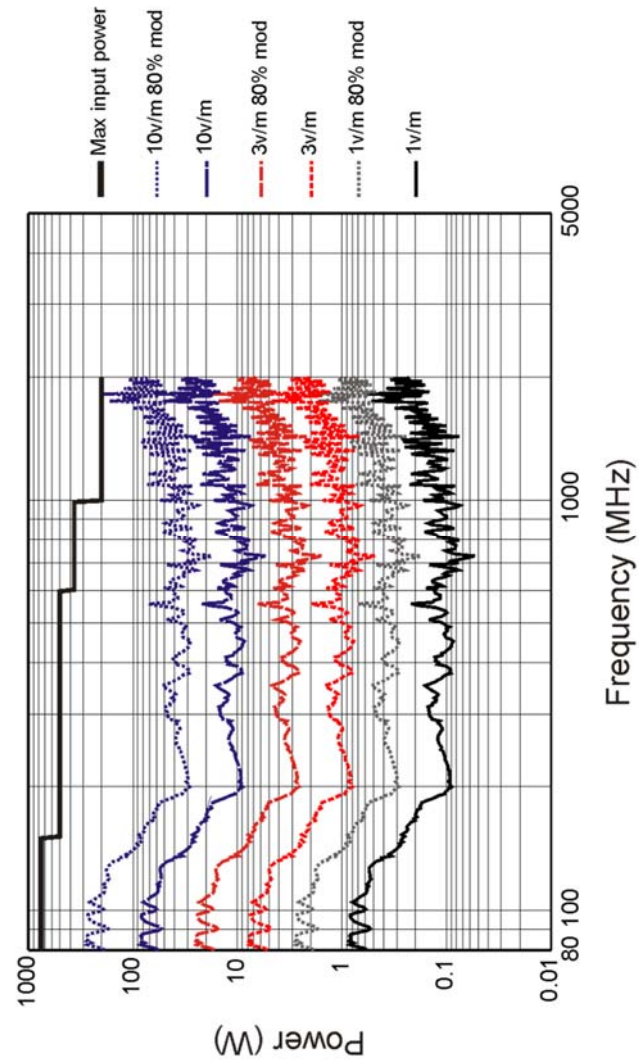

This page intentionally left blank.



## Appendix A: Warranty

---



See the *Product Information Bulletin* included with your shipment for the complete ETS-Lindgren warranty for your Model 3149.

### DURATION OF WARRANTIES FOR MODEL 3149

All product warranties, except the warranty of title, and all remedies for warranty failures are limited to two years.

Product Warranted	Duration of Warranty Period
Model 3149 BiConiLog™ Antenna	2 Years