


Model 3104C

Biconical Antenna

User Manual

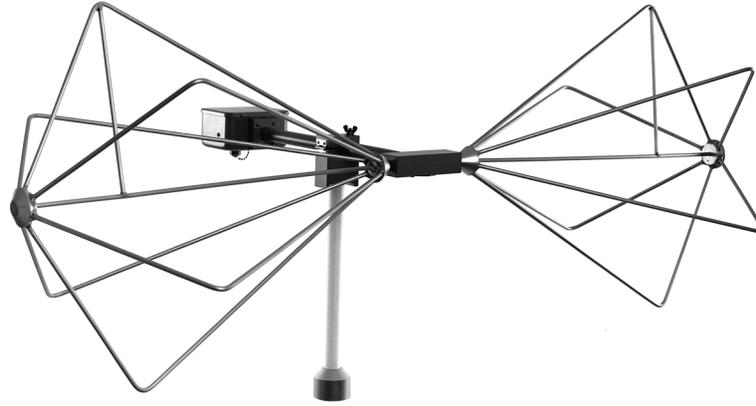

ETS-Lindgren Inc. reserves the right to make changes to any products herein to improve functioning or design. Although the information in this document has been carefully reviewed and is believed to be reliable, ETS-Lindgren does not assume any liability arising out of the application or use of any product or circuit described herein; nor does it convey any license under its patent rights nor the rights of others. All trademarks are the property of their respective owners.

© Copyright 2000–2022 by ETS-Lindgren Inc. All Rights Reserved. No part of this document may be copied by any means without written permission from ETS-Lindgren Inc.

Trademarks used in this document: The *ETS-Lindgren* logo is a trademark of ETS-Lindgren Inc.; *Delrin* is a registered trademark of E. I. du Pont de Nemours and Company.

Revision Record | MANUAL 3104C | Part #399034, Rev. G

Revision	Description	Date
A–D	Initial Release; updates / edits	2000–2002
E	Updated <i>Specifications</i>	September, 2002
F	Updated <i>PX</i> branding; updated <i>Mounting Instructions</i> ; rebrand	February, 2009
G	Corrected length dimension	March, 2022

Table of Contents

Notes, Cautions, and Warnings	iv
1.0 Introduction.....	5
Optional Items	5
Portable Elements (Model 3104CP).....	5
Extended Portable Elements (Model 3104CPX).....	6
Carrying Cases	6
Tripod Options	6
ETS-Lindgren Product Information Bulletin.....	7
2.0 Maintenance	9
Annual Calibration.....	9
Service Procedures.....	9
3.0 Specifications	11
Electrical Specifications.....	11
Physical Specifications	11
4.0 Assembly Instructions	13
5.0 Mounting Instructions	15
Using Included Mounting Adapters on a 4-TR.....	15
Additional Mounting Options.....	17
4-TR Mounting Options	17
7-TR and Mast Mounting Options.....	18
2x2 Boom Mounting Options	19
6.0 Operation	21
7.0 Typical Data	23
Model 3104C Antenna Factor	23
Model 3104C Gain	24
Model 3104C VSWR.....	25
Model 3104C Half-Power Beamwidth	26
Model 3104C Forward Power.....	27
@ 1 M–Derived from AF	27
@ 3 M–Derived from AF	28
@ 3M–Measured over Conducting Ground	29

Notes, Cautions, and Warnings


	<p>Note: Denotes helpful information intended to provide tips for better use of the product.</p>
<p>CAUTION</p>	<p>Caution: Denotes a hazard. Failure to follow instructions could result in minor personal injury and/or property damage. Included text gives proper procedures.</p>
<p>WARNING</p>	<p>Warning: Denotes a hazard. Failure to follow instructions could result in SEVERE personal injury and/or property damage. Included text gives proper procedures.</p>



See the ETS-Lindgren *Product Information Bulletin* for safety, regulatory, and other product marking information.

1.0 Introduction

The **ETS-Lindgren Model 3104C Biconical Antenna** is designed to operate over the 20 MHz to 200 MHz frequency range to meet Military and Department of Defense EMI specifications. The Model 3104C is designed and precisely manufactured to conform to the requirements of MIL-STD-461 and other Military Standards as reflected in Drawing ES-F-201286.

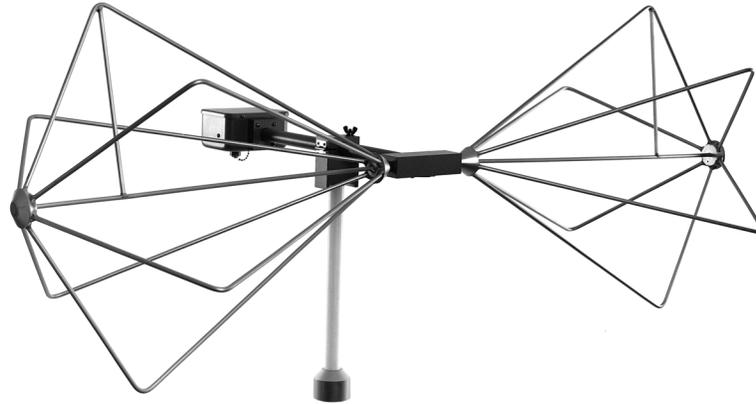

The biconical elements are made from welded aluminum. The elements mount in a balun network fabricated of phenolic and equipped with the necessary impedance-matching components. The lightweight construction provides easy handling and storage.

Each antenna is individually calibrated during the manufacturing process. The results of these calibrations are included for use in specification compliance testing.

Optional Items

PORTABLE ELEMENTS (MODEL 3104CP)

Collapsible folding elements are available, making the Model 3104C portable and ideal for field use. Both the standard rigid and optional folding elements attach to the balun using screw mounts. This makes changing between the two types of elements quick and easy.

EXTENDED PORTABLE ELEMENTS (MODEL 3104CPX)

An extended version of the portable element is available. These folding elements are twice as long as the standard elements. The longer elements enable you to generate high fields at low frequencies with reduced applied power.

CARRYING CASES

Carrying cases for biconical antennas and portable elements are available.

TRIPOD OPTIONS

ETS-Lindgren offers the following nonmetallic, non-reflective tripods for use at both indoor and outdoor EMC test sites.

- **4-TR Tripod**—Constructed of linen phenolic and delrin, designed with an adjustable center post for precise height adjustments. Maximum height is 2.0 m (80.0 in), and minimum height is 94 cm (37.0 in). This tripod can support up to an 11.8 kg (26.0 lb) load.



- **7-TR Tripod**—Constructed of PVC and fiberglass components, providing increased stability for physically large antennas. The unique design allows for quick assembly, disassembly, and convenient storage. Allows several different configurations, including options for manual or pneumatic polarization. Quick height adjustment and locking wheels provide ease of use during testing. Maximum height is 2.17 m (85.8 in), with a minimum height of .8 m (31.8 in). This tripod can support a 13.5 kg (30 lb) load.



ETS-Lindgren Product Information Bulletin

See the ETS-Lindgren *Product Information Bulletin* included with your shipment for the following:

- Safety, regulatory, and other product marking information
- Steps to receive your shipment
- Steps to return a component for service
- ETS-Lindgren calibration service
- ETS-Lindgren contact information

This page intentionally left blank.

2.0 Maintenance

CAUTION

Before performing any maintenance, follow the safety information in the ETS-Lindgren *Product Information Bulletin* included with your shipment.



Maintenance of the Model 3104C is limited to external components such as cables or connectors.

If you have any questions concerning maintenance, contact ETS-Lindgren Customer Service.

Annual Calibration

See the *Product Information Bulletin* included with your shipment for information on ETS-Lindgren calibration services.

Service Procedures

For the steps to return a system or system component to ETS-Lindgren for service, see the *Product Information Bulletin* included with your shipment.

This page intentionally left blank.

3.0 Specifications

Electrical Specifications

Frequency Range:	20 MHz–200 MHz
Impedance:	Matched to 50 Ω
VSWR Ratio (Average):	2.8:1
Power Input Capability:	<ul style="list-style-type: none">• 50 Watts continuous power• 100 Watts short-term peak power
Connector:	Type N

Physical Specifications


Length:	133.7 cm (52.6 in)
Depth:	81.3 cm (32 in)
Diameter:	53.3 cm (21 in)
Weight:	2.7 kg (6.0 lb)

This page intentionally left blank.

4.0 Assembly Instructions

CAUTION


Before connecting any components, follow the safety information in the ETS-Lindgren *Product Information Bulletin* included with your shipment.

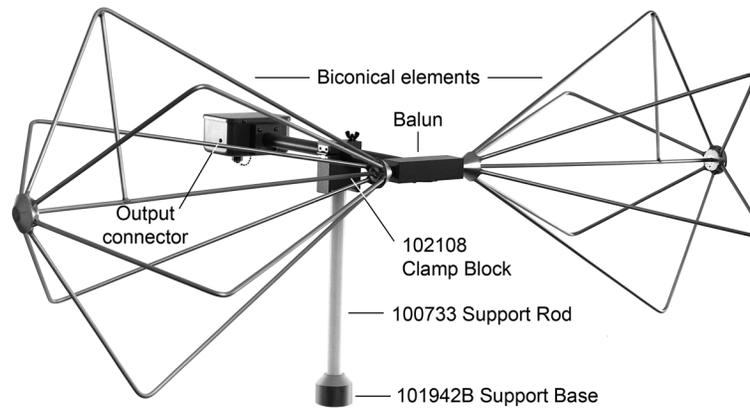

The Model 3104C Biconical Antenna is shipped unassembled, and includes these parts:

- Balun
- Biconical element (2)
- Belleville washer (2)
- 100733 Support Rod
- 101942B Support Base
- 102108 Clamp Block

To assemble the Model 3104C:

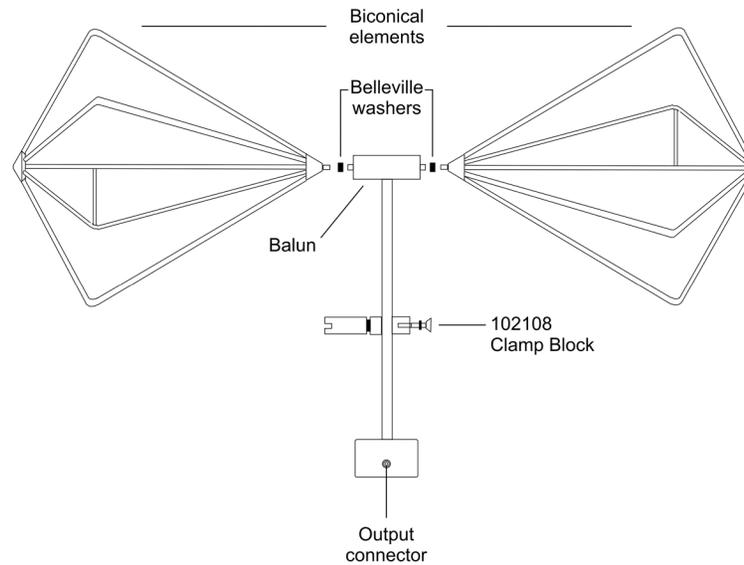

1. Slide a belleville washer onto the threaded screw end of one of the biconical elements.
2. Line up the screw threads with the receptacle hole on the balun and turn the biconical element until it is firmly secured in the balun.

CAUTION

Do not cross thread this connection or permanent damage to the joint could occur.

3. Repeat step 1 and step 2 using the remaining washer and biconical element.

5.0 Mounting Instructions


CAUTION

Before connecting any components, follow the safety information in the ETS-Lindgren *Product Information Bulletin* included with your shipment.

Using Included Mounting Adapters on a 4-TR

The Model 3104C ships with the following adapters, used to mount the antenna to a 4-TR tripod:

- **102108 Clamp Block**—Uses standard 7/8–14 threads and comes with a 1/4–20 thread adapter for mounting to an ETS-Lindgren tripod or most other tripods.
- **100733 Support Rod**
- **101942B Support Base**

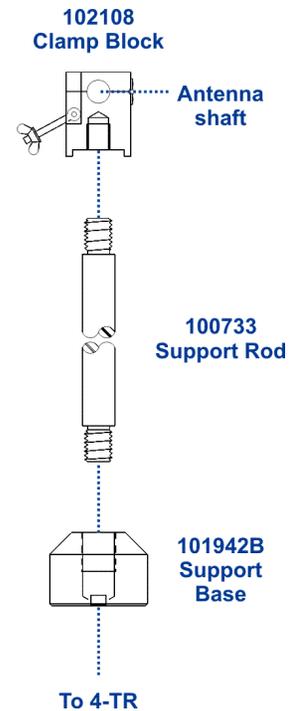


To use these adapters to mount the Model 3104C to a 4-TR tripod:

1. Assemble the clamp block, support base, and support rod.
2. Attach the support base to the 4-TR tripod.
3. Unscrew the clamp block latch and open the top.
4. Insert the shaft of the balun into the clamp block and close the top.
5. Move the latch to the closed position and tighten so the antenna is held securely.
6. Attach the cable to the output connector on the antenna.

Additional Mounting Options

4-TR MOUNTING OPTIONS

Following are additional options for mounting the Model 3104C onto an ETS-Lindgren 4-TR Tripod. Contact the ETS-Lindgren Sales Department for information on ordering optional mounting hardware.

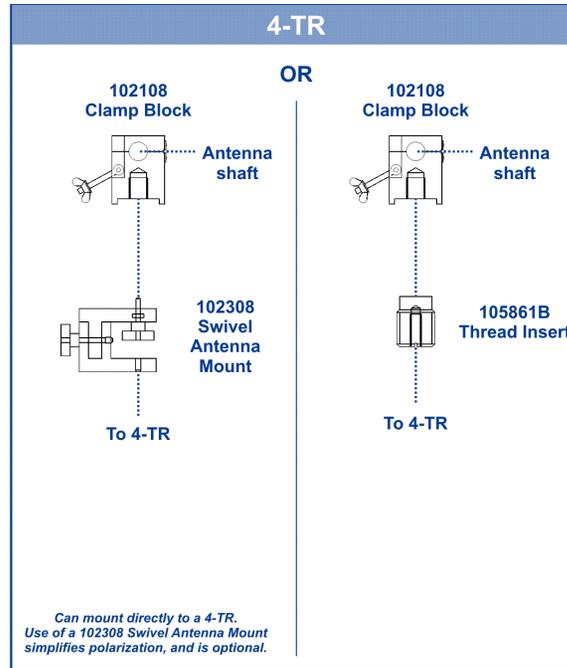

7-TR AND MAST MOUNTING OPTIONS

Following are options for mounting the Model 3104C onto an ETS-Lindgren 7-TR Tripod or mast.


Contact the ETS-Lindgren Sales Department for information on ordering optional mounting hardware.



Mast refers to 2070 Series, 2075, and 2175 Antenna Towers.

7-TR refers to 109042, 106328, and 108197 booms:

- *109042 boom*—Straight boom; for general antenna mounting on a 7-TR
- *106328 boom*—Offset boom; for general antenna mounting on a 7-TR with pneumatic or manual polarization
- *108197 boom*—Center rotate boom; for rear-mount stinger-type antennas only

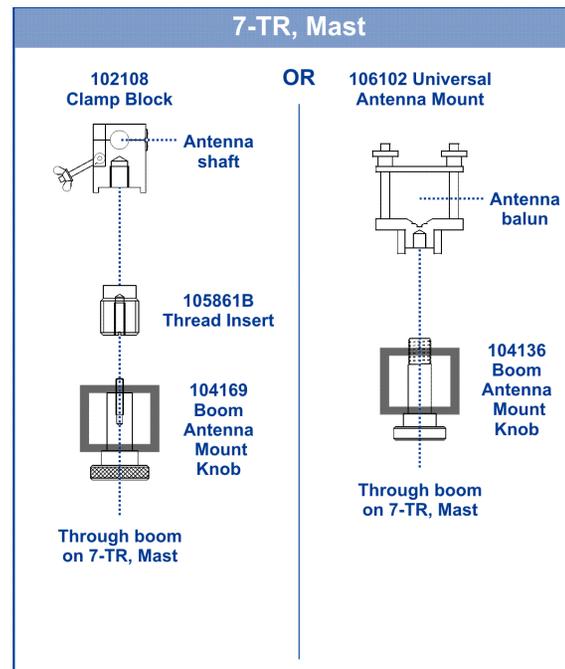


2x2 BOOM MOUNTING OPTIONS

Following are additional options for mounting the Model 3104C onto a 2x2 boom. Contact the ETS-Lindgren Sales Department for information on ordering optional mounting hardware.



2x2 boom refers to a typical 2-inch by 2-inch boom.

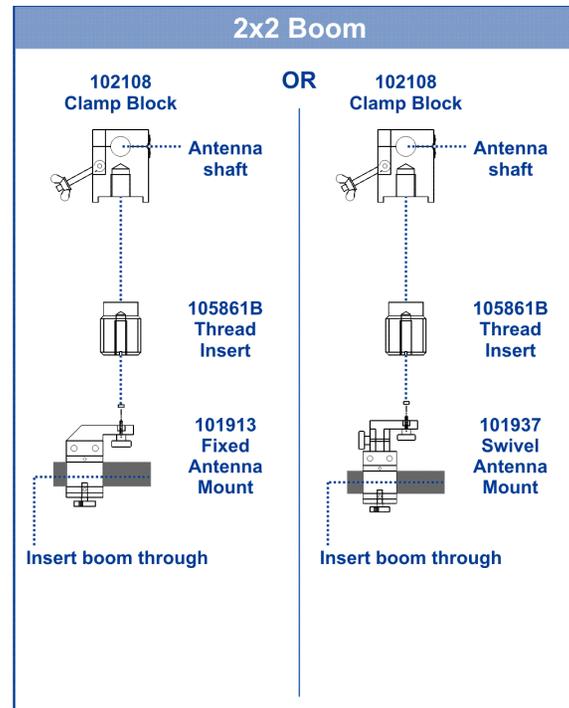

This page intentionally left blank.

6.0 Operation


The Model 3104C Biconical Antenna has a traditional coaxial wound balun that provides a broad frequency range and moderate gain for both transmitting and receiving. This antenna may be used for radiated immunity measurements provided that the peak input power is limited to no more than 100 W.

For enhanced measurement repeatability it is recommended that when the Model 3104C is used vertically the same element orientation be maintained from measurement to measurement. A white strip or dimples on the element block mark the coax shield side of the element. Keep this side towards ground when the antenna is used vertically to increase test repeatability, especially when the Model 3104C is used inside a shielded enclosure.


This page intentionally left blank.

7.0 Typical Data


Model 3104C Antenna Factor

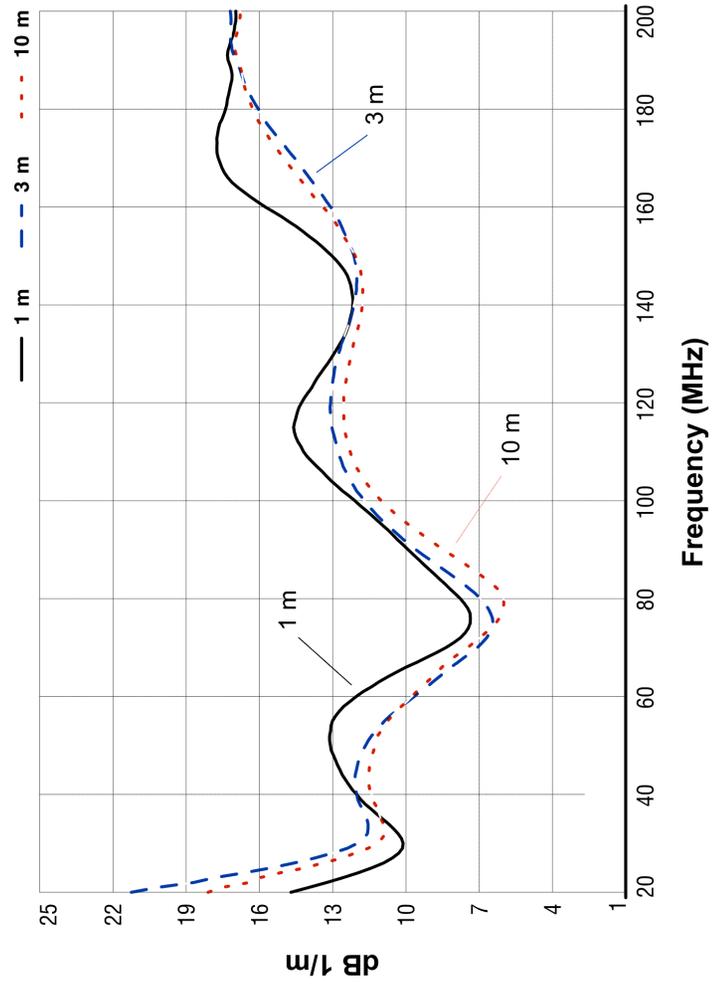


Model 3104C Gain

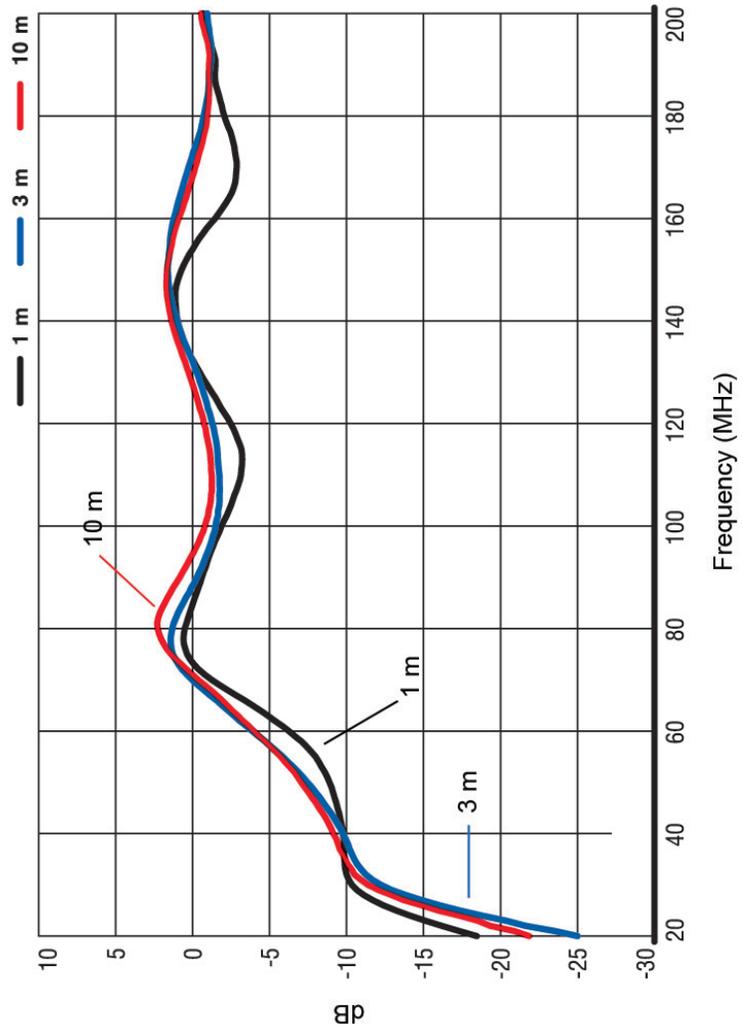

Model 3104C VSWR

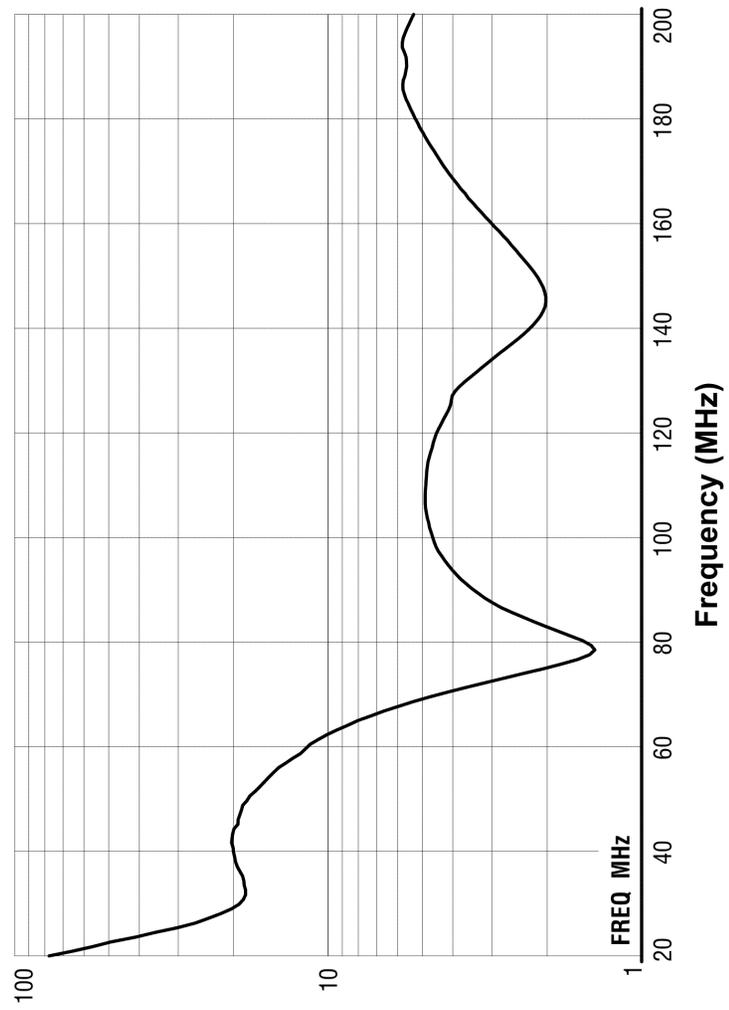


Model 3104C Half-Power Beamwidth

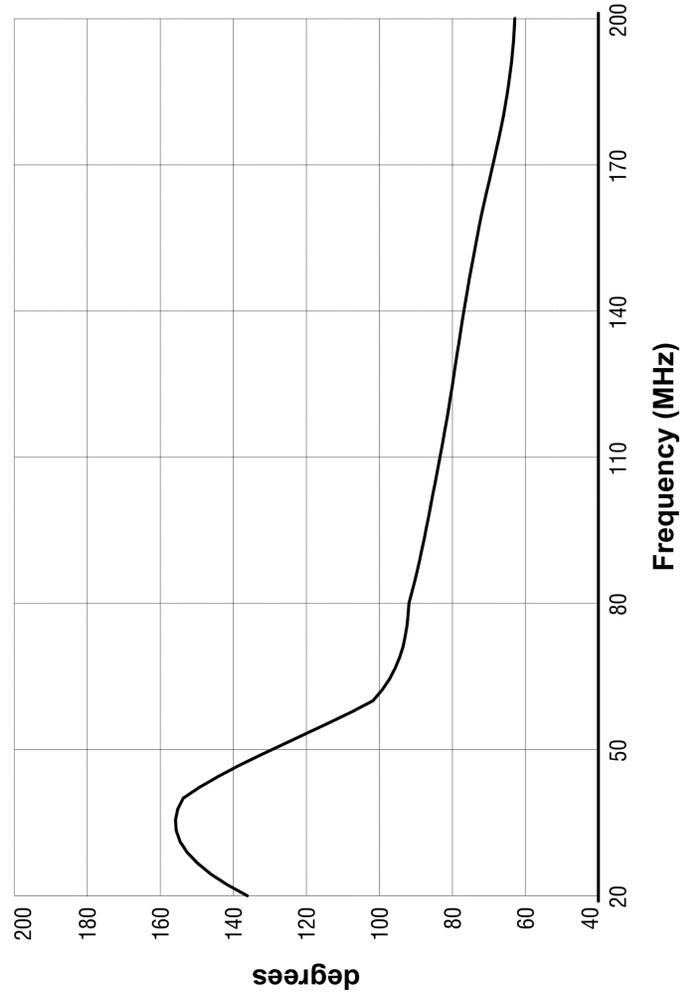


Model 3104C Forward Power

@ 1 M—DERIVED FROM AF

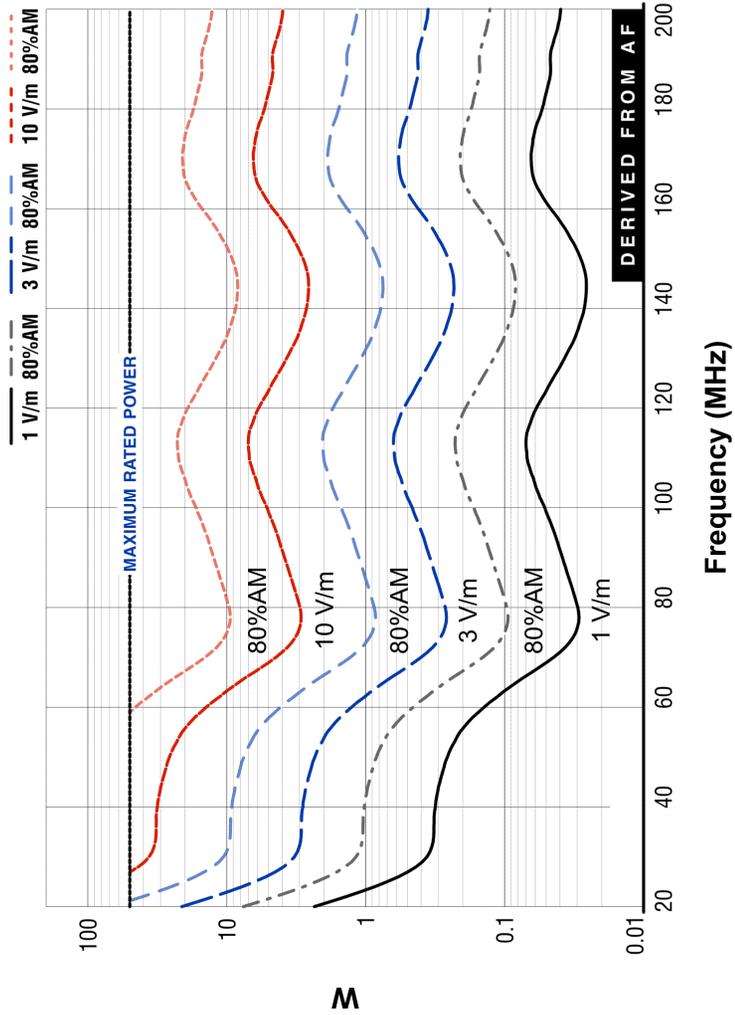

@ 3 M- DERIVED FROM AF

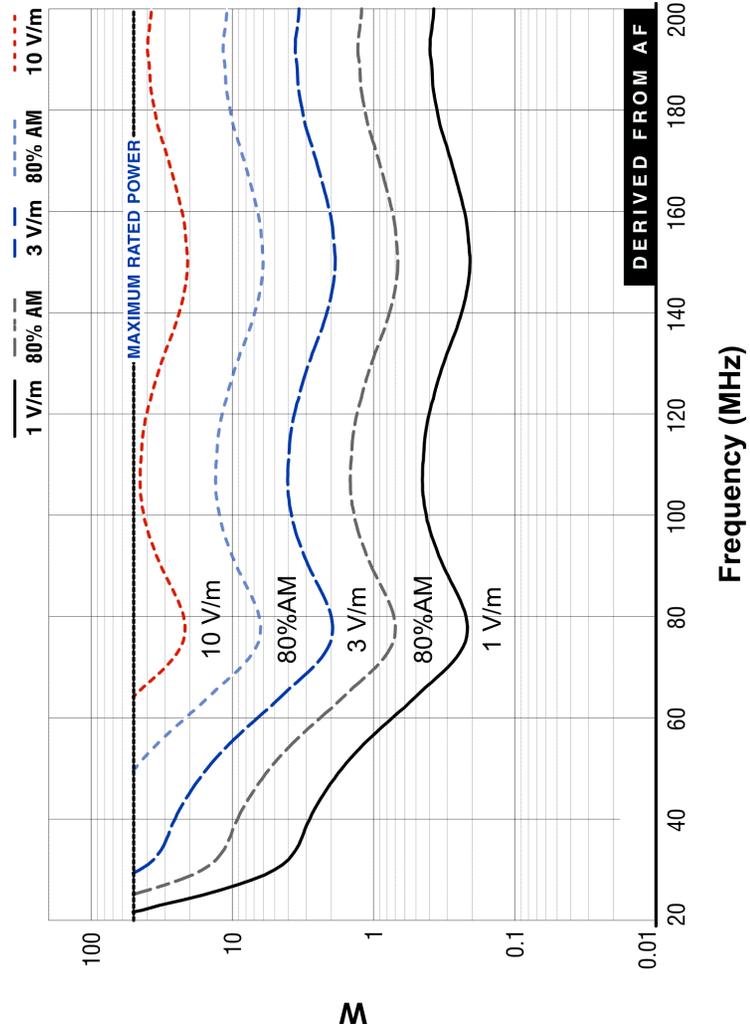

@ 3M—MEASURED OVER CONDUCTING GROUND

